




## Sales Advisory

Parker Hannifin Corporation  
Industrial Hose Division  
30242 Lakeland Boulevard  
Wickliffe, OH 44092-1747  
Telephone: (440) 833-2120  
Fax: (440) 833-2230  
www.safehose.com

### PRODUCT UPDATE

## **Series 7561 PVC Corrugated Lightweight Suction Hose – Obsolete** *Refer to Series 7560 PVC Smooth Cover Standard Duty Hose*

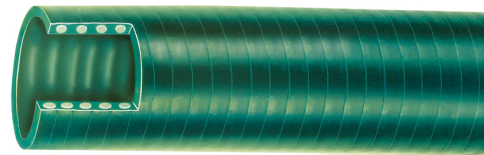


To streamline the product offering, Series 7561 PVC corrugated suction hose will be obsolete when current inventory is depleted. The discontinuation applies to both standard and non-standard part numbers within the product line, and all quotations will be expired with the discontinuation. Parker continues to offer Series 7560 PVC smooth cover standard duty hose as a suggested replacement.

*Please refer to the comparison table on page 2.*

If there are any questions please contact  
Parker Customer Service toll-free at:

866.810.HOSE (4673)  
Wickliffe, OH  
Eastern USA

800.242.HOSE (4673)  
South Gate, CA  
Western USA



*(Continued on page 2)*

PA 2013.03.014 Series 7561 OBS - 7560 REPL

ENGINEERING YOUR SUCCESS.



**Series 7561 PVC Corrugated Lightweight Suction Hose – Obsolete**  
*Refer to Series 7560 PVC Smooth Cover Standard Duty Hose*

	<u>Series 7560</u>	<u>Series 7561</u>
<b>Tube:</b>	Green PVC	Green PVC
<b>Reinforcement:</b>	White PVC helix	White PVC helix
<b>Cover:</b>	Green PVC, smooth finish	Green PVC, corrugated finish
<b>Temp Range:</b>	+23°F to +140°F (-5°C to +60°C)	+23°F to +140°F (-5°C to +60°C)
<b>Size Range:</b>	3/4" to 6"	1-1/2" to 4"
<b>Design Factor:</b>	3:1	3:1
<b>Packaging:</b>	Coils	Coils
<b>Brand Method:</b>	Not branded	Not branded
<b>Applications:</b>	Abrasive materials, debris, mild chemicals, sewage, slurries, water	
<b>Compare To:</b>	Gates 100GR; Kanaflex 100 GR; Kuriyama G and J; Pacific Echo 110 and 113; Petzatakis 12500; Superflex 1000 GR	

Part Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Approx Wt (lbs/ft)	Min Bend Rad (in)	△ Max Rec WP @68°F (psi)	Std Pack Qty (ft)
7560-1500	1-1/2	38.1	1.780	45.2	0.39	6.7	100	100
7560-2000	2	50.8	2.320	58.9	0.57	9.0	95	100
7560-2500	2-1/2	63.5	2.810	71.4	0.80	11.0	75	100
7560-3000	3	76.2	3.430	87.1	1.05	14.0	65	100
7560-4000	4	101.6	4.450	113.0	1.64	18.0	55	100
7561-1500	1-1/2	38.1	1.780	45.2	0.33	5.0	99	100
7561-2000	2	50.8	2.320	58.9	0.51	7.0	78	100
7561-2500	2-1/2	63.5	2.830	71.9	0.67	9.0	71	100
7561-3000	3	76.2	3.400	86.4	0.85	12.0	56	100
7561-4000	4	102.0	4.450	113.0	1.33	15.0	56	100

\* **Couplings:** Refer to CrimpSource at [www.safehose.com](http://www.safehose.com) for coupling recommendations and crimp specifications.

**WARNING!** Couplings attached with bands or clamps may reduce the working pressure of the hose assembly to less than the maximum rated working pressure of the hose. Refer to the NAHAD Industrial Hose Assembly Guidelines.

△ Working pressures are at +68°F (+20°C). Higher temperatures reduce the available working pressure.