



Parker Hannifin Corporation  
Industrial Hose Division  
30242 Lakeland Boulevard  
Wickliffe, OH 44092-1747  
Telephone: (440) 833-2120  
Fax: (440) 833-2230  
www.safehose.com




## NEW PRODUCT

# WILDCATTER® PROGRAM

## Series CC Crimp Couplings


### Stainless Steel Inserts & Carbon Steel Ferrules

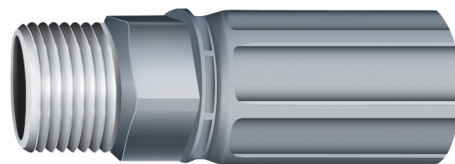

Series CC is a new crimp coupling designed for severe service commonly found in oilfield/ fracking high-pressure chemical hose applications. The CC product line provides a thoroughly tested and validated permanent connection using Parker hose and crimping equipment. The hybrid design incorporates a stainless steel insert/stem and carbon steel ferrule/shell, providing a secure, cost effective solution versus an all-stainless steel coupling.

**NOTE:** Crimp specs are on CrimpSource® at www.safehose.com.

- Crimp specs are established for Series 7374 Wildcatter High Pressure Chemical Hose; additional hoses may be qualified in the future.
- Series CC is currently offered only in a male NPTF straight rigid pipe end style; to add other styles, contact Parker.



Part Number	Hose ID (in)	Thread (in)	Thread Dash Size	Dimensions					Std Pack Qty (per ctn)	Std Pack Wt (lbs/ctn)	Stock Status **
				A (in)	A (mm)	H (in)	B (in)	B (mm)			
S101CC-16-16CW	1	1x11-1/2	-16	3.940	100.0	1-3/8	2.00	51.0	20	18.6	Y
S101CC-20-20CW	1-1/4	1-1/4x11-1/2	-20	4.060	103.0	1-3/4	2.39	61.0	-	3.0 (ea)	N
S101CC-24-24CW	1-1/2	1-1/2x11-1/2	-24	3.500	89.0	2	2.13	54.0	5	5.0	Y
S101CC-32-32CW	2	2x11-1/2	-32	5.390	137.0	2-5/8	2.14	54.0	2	13.0	Y

\*\* Stock: "Y" indicates stocked item; "N" indicates non-stocked item. Stock status subject to change. Contact Parker Customer Service.

If there are any questions please contact  
Parker Customer Service toll-free at:

866.810.HOSE (4673)  
Wickliffe, OH  
Eastern USA

800.242.HOSE (4673)  
South Gate, CA  
Western USA

